



DC-HR12130W

Valve-regulated lead-acid battery

HIGH RATE SERIES


Characteristics

Nominal voltage	12V (6 cell per unit)	
Nominal power at 15 min. rate 1.67V/cell (25°C)	130W	
Capacity (25°C)	10 Hours rate/10.8V	33Ah
	5 Hours rate/10.8V	28.8Ah
Terminal type	T14	
Torque	5.1±0.6N.m	
Approx. internal resistance (25°C)	8.0 mΩ	
Dimensions	Length	195±2mm (7.68inch)
	Width	130±2mm (5.12inch)
	Height	155±2mm (6.10inch)
	Total height	167±2mm (6.57inch)
Design Life (stand-by)	JIS at 25°C	10 years
	Eurobat at 20°C	10-12 years
Weight	11.50kg (25.40lbs)±3%	
Nominal operating temperature	25±3°C (77°F±5)	
Operating temperature range	Discharge	-15°C~50°C (5°F~122°F)
	Charge	-10°C~50°C (14°F~122°F)
	Storage	-20°C~50°C (-4°F~122°F)
Float charging voltage at 25°C	13.5V~13.8V	
Cyclic charging voltage at 25°C	14.5V~15.0V	
Temperature compensation	Float charge	-18 (mV/°C/Block)
	Cycle charge	-30 (mV/°C/Block)
Max. charging current (A)	10.40A	
Max. discharge current for 5 seconds	330A	
Self discharge rate (25°C)	≤3%/month	
Battery container ABS UL94-HB	V-0 optional	

Overview

NPP Power High Rate series batteries are specially designed for applications that require high power output. With their high-power density and low internal resistance, the HR series are the right choice for your most demanding applications.

Dimensions & Terminal Type (mm)

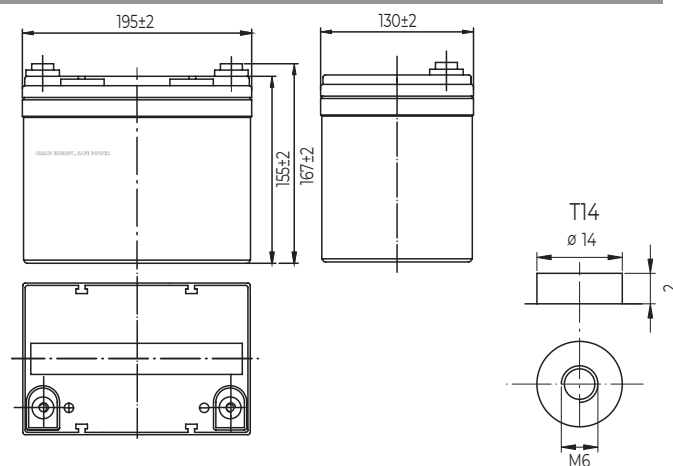

Construction

Component	Positive Plate	Negative plate	Container	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS (V-0 opt.)	AGM	Sulfuric Acid	Rubber	Copper

Constant current discharge characteristics at 25°C

(Ampere/cell)

F.V/Time	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h	6h
1.60V/cell	90.93	74.43	56.16	39.79	29.30	23.90	12.10	8.65	6.97	6.06	5.18
1.67V/cell	86.86	72.19	53.93	38.48	28.40	23.30	12.00	8.57	6.91	6.01	5.14
1.70V/cell	84.61	69.94	52.82	37.77	27.90	23.00	11.90	8.54	6.88	5.98	5.12
1.75V/cell	80.97	67.58	51.01	36.87	27.20	22.50	11.70	8.48	6.83	5.94	5.08
1.80V/cell	76.47	64.05	48.28	35.55	26.20	21.80	11.40	8.23	6.63	5.76	4.93


Constant power discharge characteristics at 25°C

(Watts/cell)


F.V/Time	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h	6h
1.60V/cell	166.46	135.34	108.07	76.76	56.60	46.20	23.50	17.00	13.70	12.00	10.30
1.67V/cell	159.18	130.00	104.03	74.34	54.80	45.00	23.30	16.90	13.60	11.90	10.20
1.70V/cell	155.02	127.26	102.01	72.92	53.80	44.40	23.20	16.80	13.60	11.80	10.10
1.75V/cell	147.73	123.22	98.37	71.21	52.50	43.50	22.80	16.70	13.50	11.80	10.10
1.80V/cell	139.41	116.15	93.22	68.58	50.60	42.10	22.20	16.20	13.10	11.40	9.76

The above characteristics represent average values and can be obtained within three charge and discharge cycles. The batteries must be fully charged before testing. The data in this document is subject to change without notice and become contractual only after written confirmation. Please contact NPP Power for the latest available version.


Discharge characteristics (25°C)

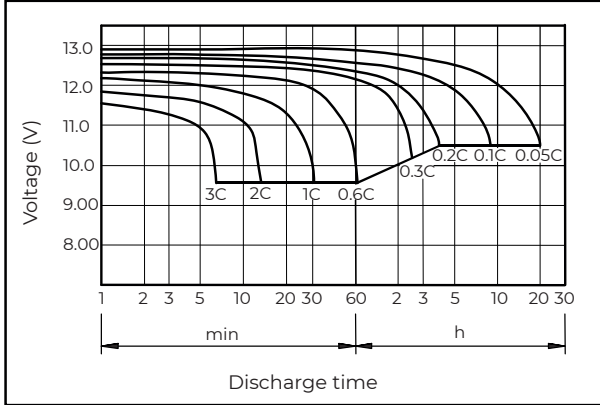


Charging characteristics (25°C)

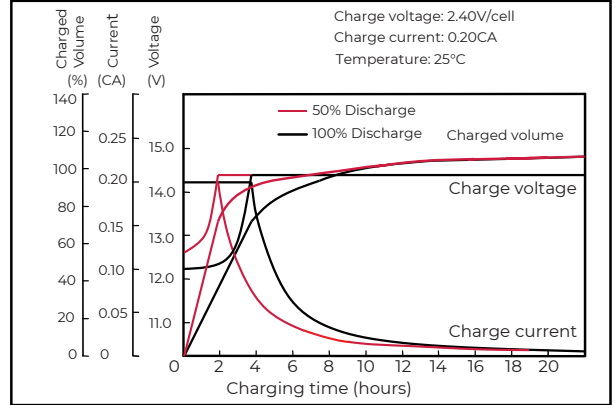


Temperature effects on capacity

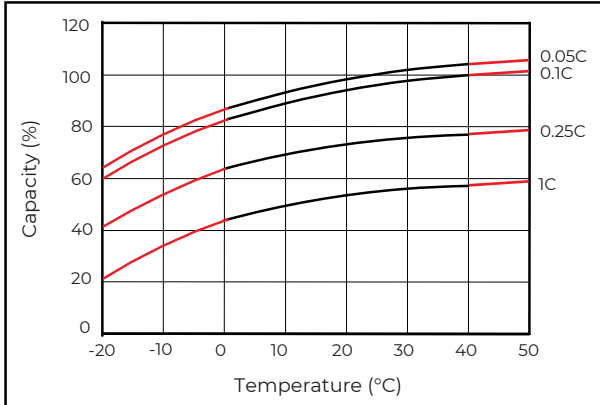


Self-discharge characteristics

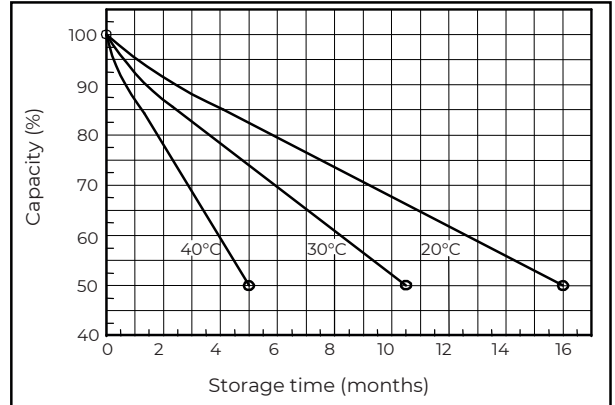


Floating life on temperature

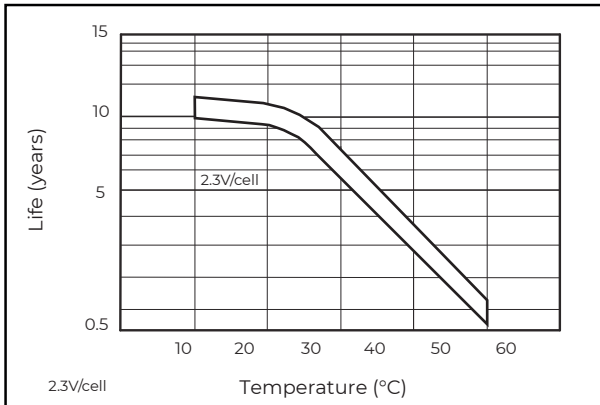

Cycle life on D.O.D (25°C)

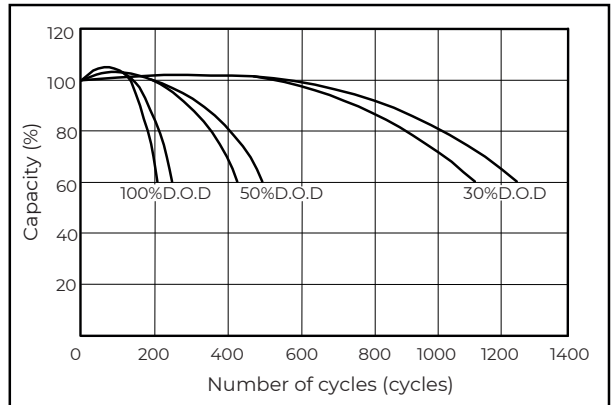

Relationship for OCV and capacity (25°C)

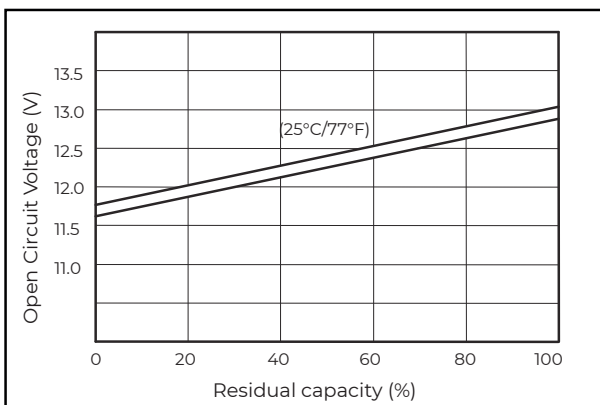

Charging voltage VS temperature

